



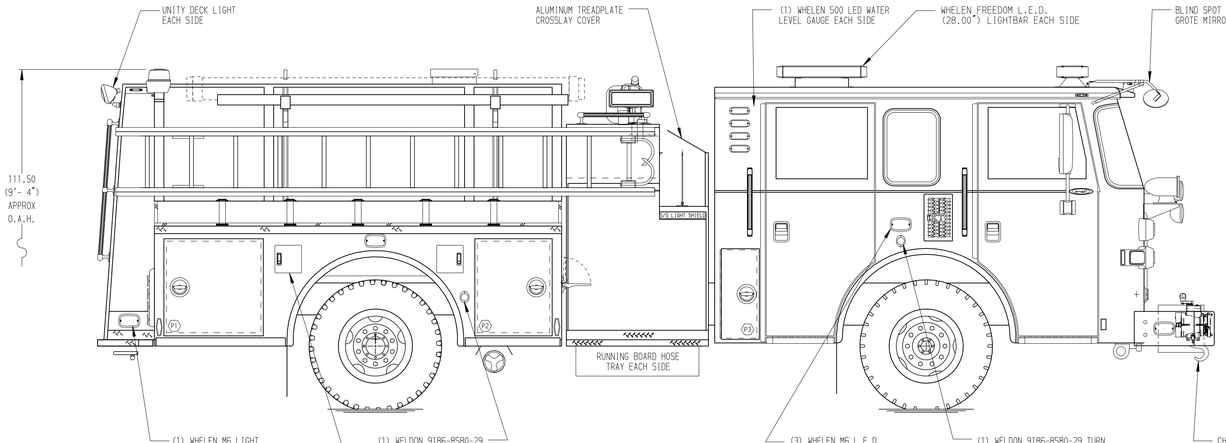


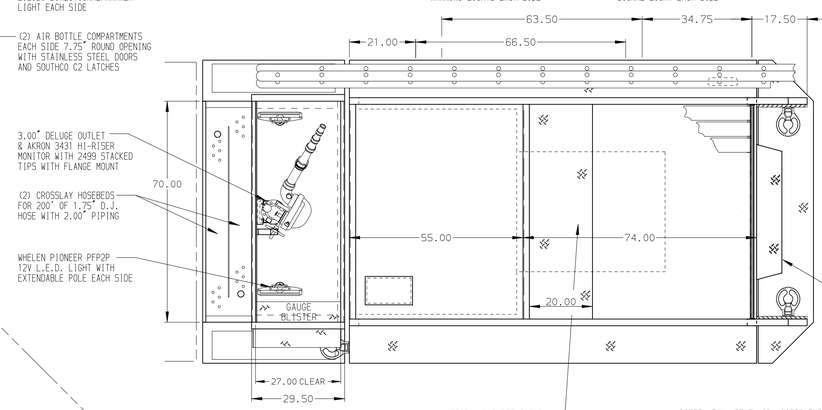


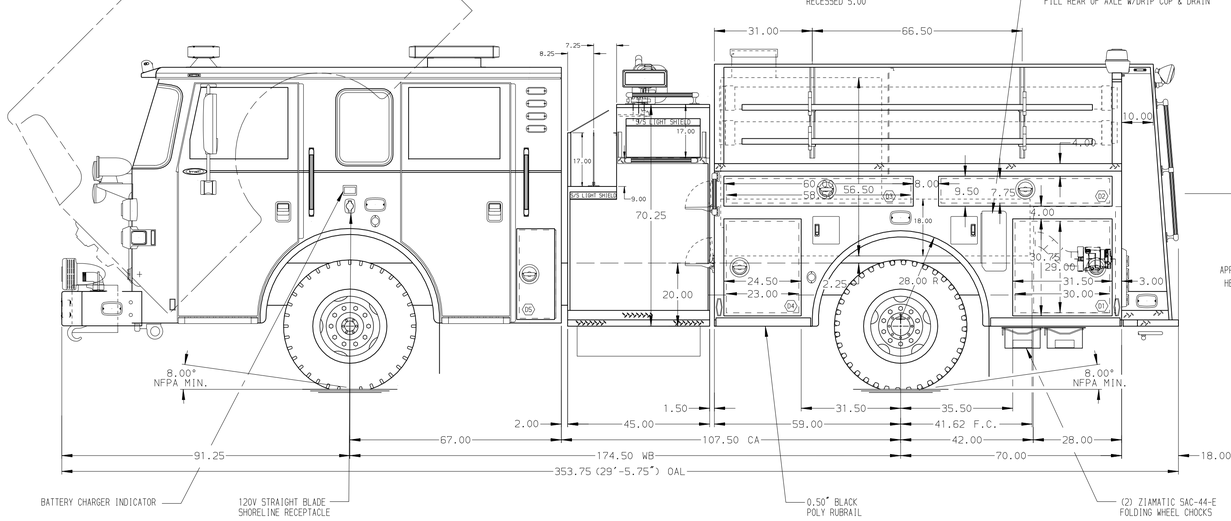

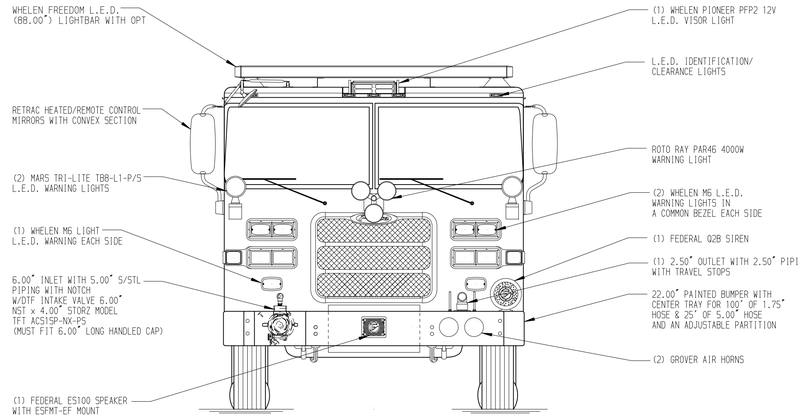



HOSEBED CAPACITIES		CALCULATED HOSE STACK HEIGHT
1	400' OF 1.75" HOSE	16.50"
2	1000' OF 3.00" HOSE	34.50"
3	1000' OF 4.00" HOSE	34.50"
4	250' OF 1.75" HOSE	30.00"
5	200' OF 2.50" HOSE	27.75"

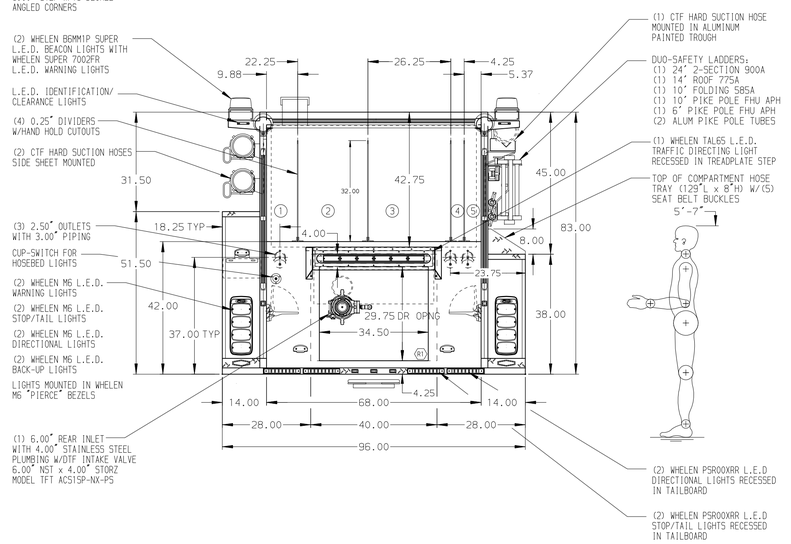

ALUMINUM BODY

MAXIMUM O.A.L. 356.00"

MAXIMUM O.A.H. 116.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. PUMP PANEL DRAWING REQUIRED
2. RUD AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
3. VOGEL LUBE SYSTEM PUMP LOCATED PER SHOP ORDER
4. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
5. S/STL SCUFFPLATE ON REAR OUTER CORNERS OF CAB
6. S/STL SCUFFPLATE ON BEAVERTAILS
7. S/STL SCUFFPLATE ON BOTTOM EDGE OF COMPARTMENTS D1, D4, P1 & P2
8. S/STL SCUFFPLATE ON REAR OUTER CORNER OF BODY
9. S/STL FENDER CROWNS ON CAB AND BODY
10. MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
11. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
12. REVERSED HINGED DOOR ON COMPARTMENT D4 & P2
13. PIERCE L.E.D. DUAL COMPARTMENT LIGHT STRIPS LOCATED PER SHOP ORDER
14. PAINTED SHELF TRACKS LOCATED IN COMPARTMENT D1, P1 & P2
15. ONE FULL WIDTH/DEPTH PAINTED ADJUSTABLE SHELF IN COMPARTMENT D1, P1 & P2
16. ALUMINUM GRATING IN ALL BODY COMPARTMENT S
17. ALL FOLDING STEPS TO BE TRIDENT WITH INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED
18. AMDOR LUMABAR H20 AY-9500-040 40.00" L.E.D. HOSE BED LIGHTS
19. PIERCE LOGO MUDFLAPS FRONT AND REAR
20. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED ON DRIVERS SIDE STEP WELL
21. BATTERY CHARGER/COMPRESSOR LOCATED BEHIND DRIVERS SEAT IN CAB
22. LINE-X COATING INSIDE BATTERY BOXES
23. (1) 0.25" UNPAINTED DIVIDER SHIPPED LOOSE
24. PROTECTIVE LINE-X COATING LINING IN COMPARTMENT R1
25. PARTITION IN COMPARTMENT D1/P1 & P1/R1

REV	DATE	BY	CH
3	26AUG14	AMI	WKL
2	25JUL14	AMI	JGO
1	05JUN14	AMI	WKL

CHASSIS DATA
MAKE: PIERCE
MODEL: ARROW XT

Pierce MANUFACTURING INC.

TITLE: 1500-D-700P WATER TANK, 129" 3/4 BROOM DS LOW PS (2)XLAYS, DELUGE, (3)HSH'S, FRONT & REAR INLET
FOR: BAY DISTRICT VOLUNTEER FIRE DEPARTMENT CALIFORNIA, MARYLAND
DWG NO.: 28054AD

JOB NO. 28054
SCALE 1:24
DATE
DRAWN BY AMI 02JUN14
CHECKED BY WKL 02JUN14
SHEET SIZE D
SHEET NO. 1 OF 1